


## Introduction of 60V/72V BMS with passive balancing


- BMS supports 16-20 battery cells in series to adapt to different voltage system
- Accurate capacity calculation (SOC&SOH), Precision reach 5%
- Under-voltage and over-voltage protection and pre-warning function
- Over current pre-warning and protection function during discharging/ charging and short-circuit protection
- Passive balancing during charging
- Over temperature /low temperature pre- warning and protection during charging and discharging
- Support charging prohibited under risk voltage(< 1.5V), ensure the safety of battery cell
- Communication interface : UART, RS485,CAN
- Customized PC GUI: reading the status of pack and each cell(current,voltage,temperature,etc.)
- Auto-sleep and wake-up function
- High discharging current and low temperature rise
- Self-Checking for fault

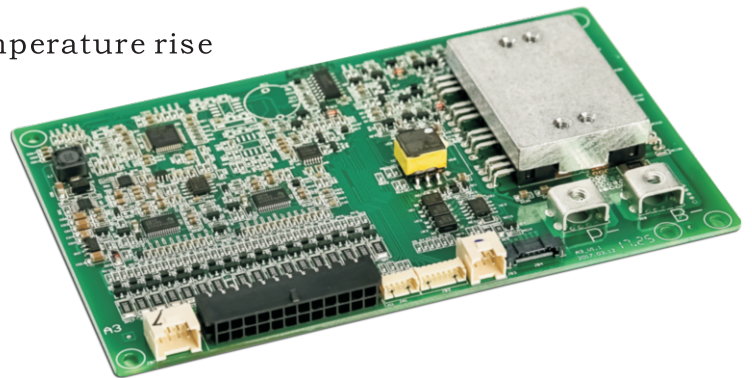

Max cell support	20cells
Max charging current(continuous)	20A(configurable)
Max discharging current(continuous)	40A(configurable)
Cmax number of temperature sensor	4
Max balancing current	100mA
Precision of Voltage	<15mV
Precision of Current	10mA
Quiescent current	<15mA
Standby current	<200uA
Size	145*90*16mm
Operating temperature	-20~85°C

## 动力锂电池60V/72V被动均衡BMS介绍

- BMS支持16~20节电芯的串联，以适应不同的电压系统
- 精确电量检测 (SOC&SOH) 功能，精度可达5%
- 欠压、过压保护
- 放电过流、充电过流、负载短路保护
- 充电过程中被动均衡
- 充放电过程中的过温、低温保护
- 支持极低电压禁止充电功能，保护电芯的安全
- 通讯接口支持UART,485,CAN等
- 支持上位机软件读取锂电池包及各节电芯当前状态 (为客户定制)
- 具有睡眠和唤醒功能
- 高放电流、低温升
- 系统故障自检

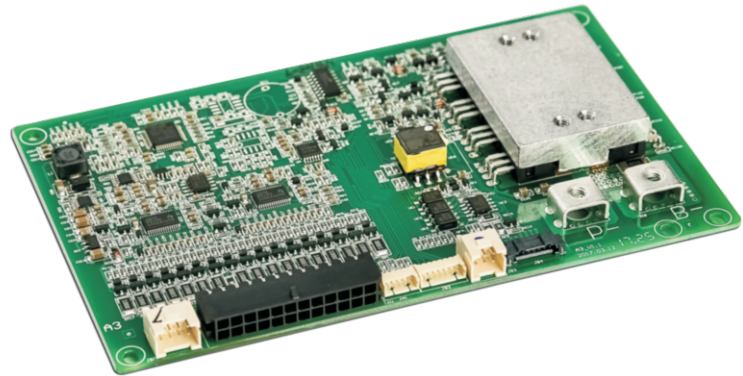

单板最多可支持电芯个数	20 cells
最大持续充电电流	20A(可配置)
最大持续放电电流	40A(可配置)
可配置温度传感器个数	4
最大均衡电流	100mA
电压检测精度	<15mV
电流检测精度	10mA
静态工作电流	<15mA
待机工作电流	<200uA
尺寸	145*90*16mm
工作温度范围	-20~85°C